



**Typical Features:**

- \* Double layer copper white PCB
- \* Bendable
- \* Epistar high quality LEDs
- \* 5M per roll
- \* IP33 rated
- \* CE and RoHS compliant

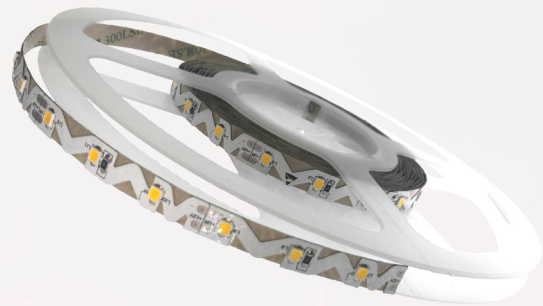

**50.00 mm Per Cuttable Section**

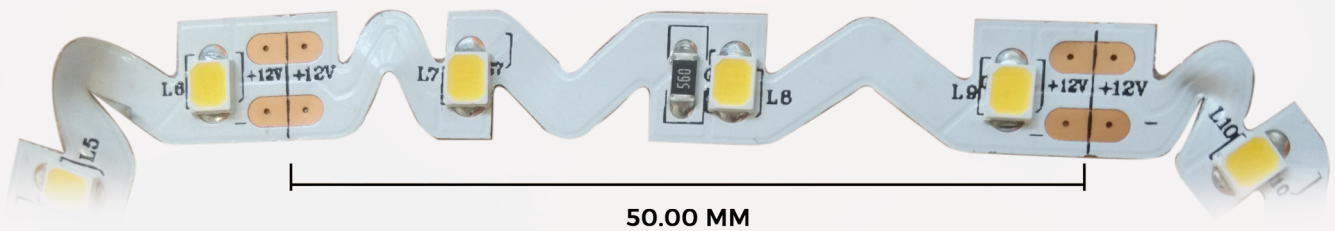

Part Number:	LED-SD-TSL-1000-12V-3K	LED-SD-TSL-1000-12V-4K	LED-SD-TSL-1000-12V-6K
LED Qty (pcs)	60	60	60
LED Source	SMD2835	SMD2835	SMD2835
Watt (W)	12	12	12
Rated Current	50mA	50mA	50mA
Working Voltage (V)	DC12	DC12	DC12
Luminous Flux (lm)	20-22lm/led	20-22lm/led	20-22lm/led
CCT (K)	3000 Kelvin	4000 Kelvin	6000 Kelvin
Colour	Warm White	Neutral White	Cool White
CRI (Ra)	70	70	70
IP Rating	33	33	33
Power Factor	0.97	0.97	0.97
Lifespan (Hrs)	50,000	50,000	50,000
Beam Angle (°)	120	120	120
Working Temp. (°C)	-20 ~ +45	-20 ~ +45	-20 ~ +45